

# Colored convex linear orders and logical limit laws

Matthew Kukla

## Abstract

We extend previous work on logical limit laws for several classes of ordered structures to the case of structures equipped with a coloring.

## 1 Introduction

In [1], first-order logical limit laws were proven for convex linear orders by adapting a Markov chain-style proof of Ehrenfeucht. We present a generalization of this argument to the case of convex linear orders equipped with a coloring (henceforth, “colored convex linear orders” or “CCLOs”). These colorings are expressed by expanding the language of convex linear orders to include a countable number of unary predicates, each indicating the color of a point. Every point is assigned a color, and multiple points may have the same color.

Colored and uncolored convex linear orders are nearly identical in structure, hence, many of the proofs in this note will follow similar arguments to those in Section 2 of [1].

## 2 Preliminaries

The language of  $t$ -colored convex linear orders, for  $t \in \mathbb{N}$ , is given by  $\mathcal{L}_t = \{<, E, C_1(x), \dots, C_t(x)\}$ , where  $<$  is a total order on points,  $E$  is an equivalence relation whose classes are  $<$ -intervals, and  $C_1(x), \dots, C_t(x)$  are unary predicates (each corresponding to a “color”). A  $t$ -colored convex linear order ( $t$ -CCLO) is a finite  $\mathcal{L}_t$ -structure  $\mathfrak{M}$  such that, for each point  $x$  in  $\mathfrak{M}$ , there is exactly one  $1 \leq i \leq t$  where  $C_i(x)$  holds. Stated formally, we require that each  $C_i(x)$  satisfies:

$$C_i(x) \iff \neg \bigvee_{\substack{1 \leq \ell \leq t \\ \ell \neq i}} C_\ell(x)$$

We say that  $x$  is an  $i$ -colored point when  $C_i(x)$  holds.

**Definition 2.1.** Let  $\bullet_i$  denote the CCLO with one class, containing one  $i$ -colored point.

**Definition 2.2.** For CCLOs  $\mathfrak{M}, \mathfrak{N}$ , define  $\mathfrak{M} \oplus \mathfrak{N}$  to be the CCLO such that  $\mathfrak{N}$  comes after  $\mathfrak{M}$  with respect to  $<$ .

**Definition 2.3.** Let  $\mathfrak{M}$  be a CCLO. Define  $\widehat{\mathfrak{M}}^i$  to be the CCLO obtained by adding one  $i$ -colored point to the  $<$ -last class of  $\mathfrak{M}$ .

We will denote the empty CCLO by  $\emptyset$ . As this structure contains no classes,  $\widehat{\emptyset}^j$  is not well-defined.

**Lemma 2.4.** Any  $t$ -CCLO of size  $n$  can be constructed uniquely, in  $n$  steps, by applying  $\widehat{(-)}^i$  and  $\oplus \bullet_i$  to  $\emptyset$ .

*Proof.* We follow an inductive argument in the same spirit as Lemma 2.4 of [1]. Let  $\mathfrak{N}$  be a CCLO of size  $n$  having  $t$  colors. If  $n = 1$ ,  $\mathfrak{N}$  contains a single point of some color  $i$ ; this is equivalent to  $\emptyset \oplus \bullet_i$ .

Assume now that any CCLO of size  $n - 1$  can be constructed from the above operations. For some CCLO  $\mathfrak{N}$  of size  $n$ , let  $\mathfrak{M}$  denote  $\mathfrak{N}$  minus the  $<$ -last point. If the last class of  $\mathfrak{N}$  contains exactly one  $i$ -colored point,  $\mathfrak{N} \simeq \mathfrak{M} \oplus \bullet_i$ . Otherwise, the last point of  $\mathfrak{N}$  is obtained as  $\widehat{\mathfrak{M}}^i$ .  $\square$

**Example 2.5.** Suppose we are working in the language of CCLOs with two colors, drawn pointwise as  $\circ$  and  $\bullet$ . Depicting  $E$ -classes with square brackets, and reading  $<$  as left-to-right, we can visualize all 2-CCLOs of size  $n$  as shown in 2.5 for  $n = 0, 1, 2$ .

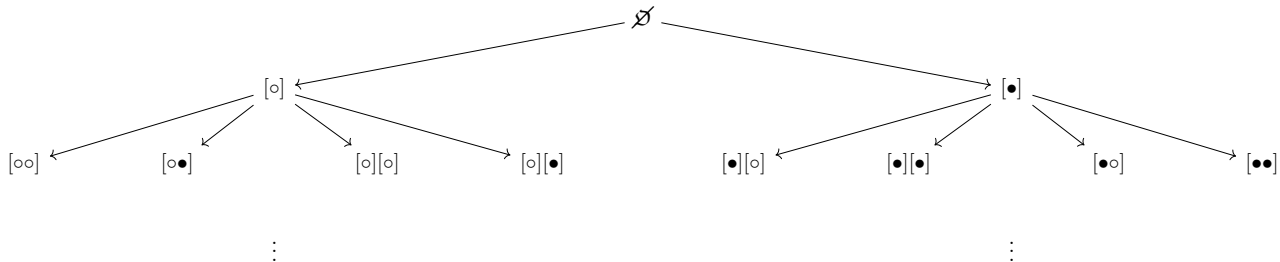


Figure 1: Constructing all 2-CCLOs of size 0, 1, 2

We write  $\mathfrak{M} \equiv_k \mathfrak{N}$  to mean structures  $\mathfrak{M}, \mathfrak{N}$  agree up to first-order sentences with a maximum quantifier depth of  $k$ . This is equivalent to requiring that Duplicator has a winning strategy in a length  $k$  Ehrenfeucht–Fraïssé game [2].

**Lemma 2.6.** Let  $\mathfrak{M}, \mathfrak{N}, \mathfrak{M}', \mathfrak{N}'$  be CCLOs with  $\mathfrak{M} \equiv_k \mathfrak{N}$  and  $\mathfrak{M}' \equiv_k \mathfrak{N}'$ . Then,  $\mathfrak{M} \oplus \mathfrak{M}' \equiv_k \mathfrak{N} \oplus \mathfrak{N}'$ .

**Lemma 2.7.** Suppose  $\mathfrak{M} \equiv_k \mathfrak{N}$ , then,  $\widehat{\mathfrak{M}}^i \equiv_k \widehat{\mathfrak{N}}^i$ .

**Lemma 2.8.** For a CCLO  $\mathfrak{M}$  and  $k \in \mathbb{N}$ , there exists  $\ell \in \mathbb{N}$  such that for all  $s, t > \ell$ ,

$$\bigoplus_s \mathfrak{M} \equiv_k \bigoplus_t \mathfrak{M}$$

Proofs of 2.6, 2.7, and 2.8 are identical to those of Lemmas 2.7, 2.8, and 2.10 respectively in [1].


### 3 Constructing a Markov chain

Fix a first-order sentence  $\varphi$  in  $\mathcal{L}_t$  with quantifier rank  $k$ . We associate a Markov chain  $M_\varphi$  to  $\varphi$  in a manner similar to the uncolored case.

For a  $\equiv_k$ -class  $\mathcal{C}$ , and any  $\mathfrak{M} \in \mathcal{C}$ , define

$$\mathcal{C} \oplus \bullet_i := [\mathfrak{M} \oplus \bullet_i]_{\equiv_k}, \quad \widehat{\mathcal{C}}^i := \left[ \widehat{\mathfrak{M}}^i \right]_{\equiv_k}$$

As in the uncolored case, any choice of representative  $\mathfrak{M}$  will yield a  $\equiv_k$ -equivalent result. We define  $M_\varphi$  recursively. The starting state is  $\emptyset$ . There are  $t$  possible transitions out of  $\emptyset$  to  $\bullet_1, \dots, \bullet_t$ , each having probability  $1/t$ . These initial transitions move only to CCLOs obtained from  $-\oplus \bullet_i$  due to the fact that  $\widehat{(-)}^i$  is not well-defined on  $\emptyset$ . For every  $\mathcal{C} \neq \emptyset$ , there are  $1/2t$  transitions out: one to  $\widehat{\mathcal{C}}^i$  and one to  $\mathcal{C} \oplus \bullet_i$  (for each  $1 \leq i \leq t$ ). Because any  $t$ -CCLO can be constructed uniquely by applying  $-\oplus \bullet_i$  and  $\widehat{(-)}^i$  to  $\emptyset$  repeated  $n$  times, this procedure will uniformly randomly sample all  $t$ -CCLO structures of size  $n$ .

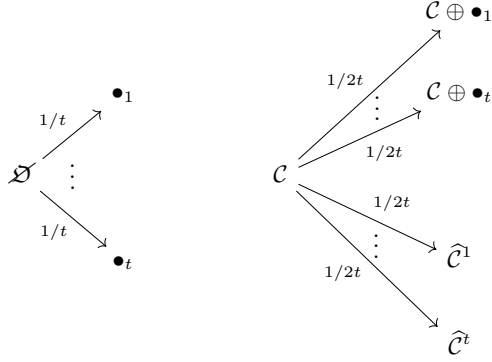

**Lemma 3.1.**  $M_\varphi$  is aperiodic for all  $\varphi$ .

*Proof.* Suppose  $M_\varphi$  were periodic. Then, there would exist disjoint sets of  $M_\varphi$ -states ( $\equiv_k$ -classes)  $P_0, P_1, \dots, P_{d-1}$  for some  $d > 1$  such that for every state in  $P_i$ ,  $M_\varphi$  transitions to a state in  $P_{i+1}$  with probability 1 (with  $P_{d-1}$  transitioning to  $P_0$ ). Writing  $j \bullet_i$  to mean  $\bigoplus_j \bullet_i$ , we have that for any  $C \in P_0$ ,  $C \oplus j \bullet_i$  is in  $P_0$  iff  $d \mid j$ . From Lemmas 2.6 and 2.8,  $C \oplus j \bullet_i \equiv_k C \oplus (j+1) \bullet_i$  for sufficiently large  $j$ , contradicting this.  $\square$


**Theorem 3.2.** The class of  $t$ -CCLOs admits a logical limit law for all  $t \in \mathbb{N}$ .

*Proof.* Consider  $M_\varphi$  for some fixed  $\varphi$ . In any  $M_\varphi$  state (a  $\equiv_k$ -class)  $S$  of  $M_\varphi$ , either every structure in  $S$  satisfies  $\varphi$  or no structures in  $S$  satisfy  $\varphi$ . By the definitions of  $-\oplus \bullet_i$  and  $\widehat{(-)}_i$  for  $\equiv_k$ -classes, moving  $n$  steps in  $M_\varphi$  (starting from  $\emptyset$ ) is equivalent to uniformly randomly selecting a CCLO of size  $n$  and taking its  $\equiv_k$ -class. Hence, the probability of  $M_\varphi$  being in a state which satisfies  $\varphi$  after  $n$  steps is equal to the probability that a randomly selected CCLO of size  $n$  satisfies  $\varphi$ . It is sufficient to show that the probability of  $M_\varphi$  being in a satisfactory state after  $n$  steps converges as  $n \rightarrow \infty$ ; this follows from the fact that  $M_\varphi$  is finite and aperiodic.  $\square$

## 4 Reduction to the uncolored case

We briefly note that limit laws for uncolored convex linear orders can be obtained as a special case of 3.2. An uncolored structure may be equivalently viewed as a colored structure with exactly one color. Hence, the relation  $C_1(x)$  holds for every point  $x$ , so that there is no distinction in terms of color on the points.

We have two operations for building such structures:  $\widehat{(-)}^1$  and  $-\oplus \bullet_1$ . These are equivalent to the corresponding operators  $\widehat{(-)}$  and  $-\oplus \bullet$  in Definition 2.2 and Lemma 2.4 respectively of [1] (the subscripts are dropped hereafter). Following the procedure in 3, we construct  $M_\varphi$  for first-order sentence  $\varphi$  as:

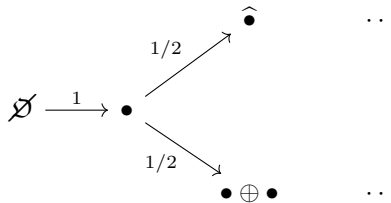

The initial transition has probability 1, as there is only one way to construct  $\bullet$  from the empty order. From this diagram, it can be seen that moving  $n$  steps in  $M_\varphi$  is equivalent to moving

$n - 1$  steps in the Markov chain defined by [1], due to the fact that the latter is defined starting at  $\bullet$  rather than  $\emptyset$ . The two Markov chains will converge to the same limiting probability as  $n \rightarrow \infty$ .

## References

- [1] Samuel Braufeld and Matthew Kukla. Logical limit laws for layered permutations and related structures. *Enumerative Combinatorics and Applications*, 2(S4PP2), 2021.
- [2] Joel Spencer. *The Strange Logic of Random Graphs*, volume 22. Springer Science & Business Media, 2001.